



04-26-00

A

Scott C. Harris, Esq
PO Box 927649
San Diego CA 92192-7649
Telephone: 619-823-7778
Fax: (858) 678-5082



April 24, 2000

Attorney Docket No.: SCH/PAGE ENCRYPTION

Box Patent Application

Assistant Commissioner for Patents
Washington, DC 20231

Presented for filing is a new original patent application of:

Applicant: SCOTT C. HARRIS

Title: PAGE ENCRYPTION SYSTEM

Enclosed are the following papers, including those required to receive a filing date under 37 CFR 1.53(b):

	<u>Pages</u>
Specification	20
Claims	4
Abstract	1
Declaration	2
Drawing(s)	6

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL33980643645

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

4-24-00
Date of Deposit

Janet Christy
Signature

Janet Christy
Typed or Printed Name of Person Signing Certificate

09557278 042400

Assistant Commissioner for Patents
April 24, 2000
Page 2

Enclosures:

— Postcard.

This case is entitled to small entity status. An executed small entity statement is attached.

There are 15 claims, 3 independent.

Basic filing fee	\$345
Total claims in excess of 20 times \$9	\$0
Independent claims in excess of 3 times \$39	\$0
Fee for multiple dependent claims	\$0
Total filing fee:	\$345

A check for the filing fee is enclosed.

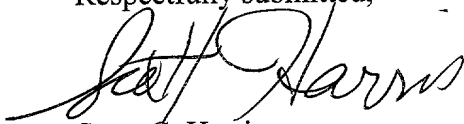
If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (619) 823-7778.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

SCOTT C. HARRIS
P.O. Box 927649
San Diego, CA 92192

Respectfully submitted,



Scott C. Harris
Reg. No. 32,030
Enclosures
SCH/jzc

004240 "B22560

Applicant or Patentee: Scott C. Harris
 Serial or Patent No.:
 Filed or Issued: Herewith
 For: PAGE ENCRYPTION SYSTEM

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
 (37 CFR 1.9(f) and 1.27(b)) - INDEPENDENT INVENTOR**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled described in

☒ the specification filed herewith.
☐ application serial no. , filed .
☐ patent no. , issued .

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

☒ no such person, concern, or organization.
☐ persons, concerns or organizations listed below*.

*NOTE: Separate verified statements are required from each named person, concern, or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

Full Name: _____

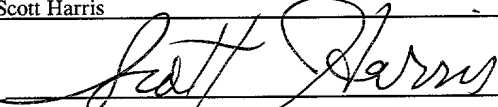
Address: _____

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status when any new rule 53 application is filed or prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Inventor: Scott Harris

Signature:  Date: 4/24/00

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: PAGE ENCRYPTION SYSTEM


APPLICANT: SCOTT C. HARRIS

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL339806436US

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

April 24, 2000
Date of Deposit


Signature

Janet Christy
Typed or Printed Name of Person Signing Certificate

004240" 822550

PAGE ENCRYPTION SYSTEM

5

BACKGROUND

The present application relates to encryption of formatted pages. More specifically, this relates to encryption of a page to be transmitted over a channel, e.g., a network such as the Internet.

Encryption includes the study of trying to increase the security of a system. Attacks on encryption attempt to defeat that security. A sufficiently complicated cryptosystem will make it effectively impossible to decode plaintext from only ciphertext. If sufficiently difficult, only a brute force method, i.e., a test of each of the possible keys, could recover the plaintext.

However, very complicated cryptosystems are often used for carrying out the encryption and decryption. For example, many of these complicated crypto systems use various techniques including multiple arithmetic operations, and attempts to smooth the frequency distribution of the resulting ciphertext.

The frequency distribution of the ciphertext can be used as a way to attempt to recover the plaintext. Many early cipher systems, in fact, were defeated using the principle of frequency analysis.

004240-0440

The trend in the art has been to make a more complicated cryptosystem based on more complicated mathematics. This in turn, however, requires higher processing requirements, and higher data handling capabilities. Many of these systems require a large portion of the message to be received before the entire decryption is carried out. Encryption on a thin client such as a handheld computer; personal digital assistant ("PDA"); or portable telephone can require a significant portion of the resources.

Summary

The present application teaches encryption by first formatting text for display, and then encrypting that text. This system can be more secure than other cipher system, for a given level of complexity. The usual kinds of frequency-based attack methods are less applicable to this new system. Moreover, the present system is extremely useful for use over a transmission channel, e.g. a network such as the internet or a wireless channel.

The present application teaches a technique of coding a text or text-containing file by converting the text to an image viewable form indicative of the text. The viewable

version of the text is encoded using a block based or pixel based coding scheme. Those coded values are encrypted.

At the receiving end, the encrypted values are decoded to retrieve the formatted text.

5 The system encrypts and returns images of whole formatted text, rather than the ASCII text itself that is returned by many cryptosystems.

10 In this way, text is recovered but in a way that reduces the possibility of cryptanalysis by using frequency techniques.

One embodiment of this system adds an additional layer of security using steganographic techniques to encode information within the text itself.

15 Yet another embodiment of this system is optimized for use in a thin computer such as a PDA or cellular telephone. Each unit portion of the image can be handled as a single block, and decoded as one block. This reduces the amount of memory that needs to be used for the decryption.

20 In one embodiment, the decryption simply corresponds to a series of numbers or characters. The numbers indicate the kind of image which is displayed on the page. This series of numbers cannot by itself be read or perceived without other information. Brute force analysis methods can become more difficult. Since there is no standard by

which a brute force analysis can be judged as right or wrong, it becomes more difficult to effect such an analysis.

Another aspect describes specific coding schemes which can be used, including run length coding, and specific forms of run length coding.

A BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects will now be described in detail with reference to the accompanying drawings, wherein:

FIGURE 1 shows as basic block diagram of the system;

Figure 2 shows a flowchart of operation;

Figures 3A and 3B show coding text which has been formatted using different fonts;

Figure 3C shows sampling text in opposite directions;

Figure 4 shows an HTML embodiment which encodes text attributes and images;

DETAILED DESCRIPTION

Figure 1 shows a system operating between a server 100 and a client 150, e.g. a thin client. The server 100 includes a message 102 which is to be sent to the client 150. This message is text-containing information. The

text containing information can include plain text (a "txt" type file), a word processing file which can include font and / or control information, an HTML file, or other information that can be formatted into a perceivable form.

5 The information is sent over a channel 140. Channel 140 may be a wired channel, or a wireless channel such as a part 15 frequency e.g., 48 MHZ, 900MHZ, 2.4GHZ, or by BLUE TOOTH(TM), or an infrared channel. The plaintext message can be from any source, e.g., from an e-mail request. It
10 can also be a web page, e.g., in hypertext mark up language ("HTML").

An embodiment is disclosed herein which uses this encryption system in a thin client environment, such as a hand held computer element e.g., a PDA such as the PALM™
15 series of handheld computers, some other handheld computer, or a portable telephone. Less power and memory may be available in this environment. However, it should be understood that the disclosed system is usable in any computing environment.

20 This system has a number of advantages. Since the system operates on shapes, it can be less susceptible to decryption by frequency analysis that is based on the character of alphabets. Also, since this system encodes shapes, no CRC or other kind of error check needs to be

used. Errors will simply show up as noise in the resulting
"plaintext". Such letters will not make the plaintext
unreadable, as it could in systems that return text values.
This can be an advantage, since the error check part of an
5 encryption sequence can itself be used as a means of
detecting whether any particular key is the correct key.
In turn, such systems are often used in brute force
analysis techniques.

The basic hardware forming the basic setup of the
10 present invention is shown in Figure 1. A server computer
100, at a central location, stores a database of
information, as well as a user interface program, and a
main program which can run a network interfacing program,
such as a web browser. The server computer 100 is
15 connected to a channel 110, which connects the server 100
to a plurality of client computers 150, 155. The network
can be the Internet, or can be any other network that
allows an exchange of information. For example, in one
embodiment, the network 110 may be a dedicated dial-up or
20 LAN network. The network comprises at least an information
line, and a router 130. The information line 110 can be a
telephone line and the router 130 can be the internet
backbone, for example. The server computer 100 runs a

routine that is described with reference to the flowchart
of figure 2.

Many client computers can be connected to the server
100. Clients can be at a remote location. The client
5 could also be local; e.g., when the encryption is on the
local drive associated with a computer.

The client computer 150 can be any computer which is
capable of receiving information over the channel 130. In
addition, the client computer can have various peripherals
10 attached thereto. These peripherals can include, for
example, an image sensor 135 which can be used as a camera
or a bar code reader, a fingerprint reader, or the like.

In operation, each or any of the client computers is
driven to run the specified routine under control of the
15 server 100.

The specified routines run by both the client and
server computers are shown in Figure 2. It should be
understood, however, that multiple client computers could
simultaneously operate. When this happens, this server
20 part of the routine may have multiple clients requesting
information from the same server. A multitasking system
can be used to handle these requests.

Figure 2 shows the operation. At 200, a message to be
sent is obtained. This message is conventionally referred

to as plaintext, and is converted into ciphertext according to an encryption key. The encryption key can be stored in the client computer, or entered from an external source.

This cryptosystem uses a mapping, f , from the
5 plaintext message segment, M , to a ciphertext segment, C .
A parameter E is the cryptographic enciphering [key]. Here f
is the enciphering algorithm that generates C from M and E .
Thus, $C = f(M, E)$. The message is decrypted according to a
mapping g using a decryption parameter. D , is the

10 deciphering key, which may or may not be the same as the
enciphering key E , and g is the deciphering algorithm that
recovers the original message M from the received
enciphered message C and the deciphering key D . Hence
 $M = g(C, D)$. In a stream cipher, these can be [small]

15 functions. The message is divided into segments, M_k , and a
stream of key, E_k , is generated.

The sender computes the stream $C_k = f(M_k, E_k)$.

The recipient generates or stores the stream D_k and
decodes $M_k = g(C_k, D_k)$.

20 The cryptological technique can be made public or can
be private. The security against unauthorized reception is
in the key stream, E_k . The mutual information between M_k
and E_k should be sufficiently small that the message cannot
be determined by statistical methods. Alternately, the

space from which E_k is selected can be too large to be searched.

For a public key system, the objects are from very large sets, e.g., 128 bits which is $2^{128} \approx 3.4 \times 10^{38}$ items.

5 The public knows the function f . The encryption key, E , is distributed. A message sender computes and transmits $C = f(M, E)$, and transmits E if it is randomly generated. In this case, the owner of the system also has g and either has D or has an algorithm to generate g from E . The owner
10 then computes $g(C, D)$ to recover M . The security of such a system is based on the difficulty of inverting the function f , without additional information that is known only to the owner. Any known encryption system including PGP, RSA, DES, SHA, or any others can be used. The ciphertext should
15 be sufficiently unrelated to the plaintext such that the plaintext cannot be obtained from the ciphertext without the key, without an extreme degree of difficulty.

20 The encryption scheme can be any desired encryption scheme, including based on elliptical curves, DES, RSA or the like.

Once the message is received at the receiving end in a messaging environment, it will be displayed to the user. Display of a message involves formatting the message into a readable form, and displaying that readable form on the

screen of the messaging element, e.g., a computer. The present application carries out the display formatting operation prior to encryption. In this embodiment, the plaintext is text only, but it should be understood that

5 the plaintext may include other information as in other embodiments. The text, represented in ASCII or any other form, is formatted for display. This can use a system default font, or if font information is included with the text, the system can use that font information. For

10 example, the text may be stored in a word processing format, such as Word or Rich Text Format ("RTF"). The text is then formatted for display. A sample of the text as formatted for display is shown in Figures 3A and 3B.

At 205, the computer 100 formats the information for

15 display. This format for display includes formatting the plaintext according to its font and display information. The display is formatted according to a specified resolution, where the resolution can be one established in advance, or can be any other desired resolution. In the

20 case of a thin client, the resolution may be relatively low.

The formatted plaintext is then coded according to its viewable characteristics. Examples of the coding are shown in Figures 3A and 3B. It is recognized, as many have

recognized before, that displayed text is mostly formed of continuous blocks of the same type of information.

Therefore, the pixels may include long blocks of white, followed by relatively long blocks of black. On the pixel

5 scale, assuming an 800x600 resolution, it might be common to see 50 white pixels, followed by 10 black pixels and the like. The preferred coding scheme disclosed herein takes advantage of this characteristic. Figures 3A and 3B show this. The line 300 in Figure 3A represents a one pixel

10 wide sample. Of course, unless the pixels are extremely coarse, they will be much smaller in scale than that shown in Figure 3A. All of the textual material that intersects the pixel is sampled. For example, the first part C1 is a series of white pixels. These white pixels are encoded as
15 zeros, yielding a long string of zeros beginning the code. The distance C1 shown in Figure 3A represents the length of the long string of zeros. The string of zeros ends at the beginning of the "T", where the black part beginning the letter "T", begins. The width of the T, here area C2, is
20 then encoded as "1"s, representing black. Similarly, white "0" and black "1" areas alternate across the entire line 300. Figure 3A shows obtaining the values C1 through C12 to represent the sample along the word "This". Similar operations are carried out for pixels T-1 through 0 and for

pixels T+1 through T max resolution. This is shown in Figure 2 which requires sampling all pixels and recording the transition from white to black.

When this operation is complete, the entire image has been reduced to a series of numbers representing the transition points of the formatted plaintext at the specified resolution and display characteristics. A special symbol or character may be used to represent the end of the line. Alternately, in order to avoid all lines having precisely the same length, the end of line can alternatively be established at the spot 325 which represents the last transition. In this way, each of the lines may have a different length. As an example of the way in which this system operates, consider Figure 3A as compared with Figure 3B. This shows that the numbers that would be transmitted for different fonts are unrelated.

At 220, the codes for a "chunk" is transmitted. The chunk can be the whole page, or only part of the page. The chunk is received by the client at 225, and decrypted and displayed at 230. The chunk may be displayed as soon as it is received; so that storage of multiple parts becomes unnecessary. Each chunk can be a line or line part.

A number of coding simplifications can be used. First, since the system always codes only transitions, only

the values, e.g., numbers, representing the distance
between transitions need to be sent. By convention it can
be established that the initial numbers are always zeros.
If the initial number is a one, such as at spot 306, then
5 the first number sent will be a zero representing an
immediate transition.

A special symbol or series may be used to represent
multiple chunks being the same. For example, this can
occur when one line of pixels is the same as another line
10 of pixels.

Yet another symbol can be used to represent that an
entire row of white or black pixels is sent.

The end result is a series of codes representing the
run-length-coded version of the plaintext. This series of
15 codes is then encrypted at 215.

This series of codes can be encrypted using any
encryption technique. However, since this system is less
susceptible to frequency analysis, a relatively lower
security encryption system may be used. Less secure
20 encryption systems may be less mathematically intensive.
Therefore, this system is more useful for a thin client
such as a handheld computer, cell phone or the like.

A less secure encryption system requires fewer
calculations. In addition, this has the additional

advantage that parts of the display formatting are actually carried out in the client encrypting computer. This allows the decrypting computer to effect fewer calculations since the display formatting has already been carried out.

5 Effectively, the information to be displayed is already formatted for display and simply needs to be decrypted in order to be displayed.

Also, each chunk of information can be displayed as soon as it is received and decrypted. This avoids storage
10 of large amounts of information, which can itself require resources.

A number of additional aspects can make this system more secure. While the system is less susceptible to certain kinds of decryption attacks, it may be susceptible
15 to an attempt to "stitch" together different parts of the lines. The main embodiment disclosed above teaches variable length lines ending at the last transition. Other techniques can also avoid this stitching. An alternative embodiment encodes the image as though it were one long
20 line. In this system, the end of the T in test is the first transition to white, and the beginning of the T in "the" in the next line is the next transition. This represents the number of white pixels, and may make stitching more difficult.

Another embodiment rearranges the lines to be transmitted in a random order. In this way, stitching becomes more difficult. The line number can be established in advance, can be transmitted as part of the message, or
5 in a particular embodiment, can be transmitted as part of the message.

An alternative way is to have the client 150 use a random number generator to set the order of lines. This random set of numbers can be sent to the encrypting
10 computer 100 between pages. The client 100 then sets the pages.

Alternatively, the same operation can be done in the encrypting computer 100, which can use a random number generator to set the order, encrypt that message using a
15 first key (which can be more secure than the second key) and then send the lines in that way.

Yet another alternative is to send the information in alternative directions, e.g., a zigzag operation as shown in Figure 3C. The end of one line doubles back toward
20 starting at the end of the next line, going in the reverse direction. Again, only the positions of transitions need to be encoded.

Other alternatives allow using more complicated procedures. The above has discussed use for straight text.

This system also has use with gray scale operations. In that case, a different system, other than the run length coding, may be used. Alternatively, a system of run length codes which encode more than just transitions might be
5 used. The system can also be used to store text which includes images therein.

For example, many messages are in html format. These messages may include images or other information as part of the text, and may also be in color. An embodiment for
10 encoding such an html message is disclosed herein. It should be noted, however, that since this system is less susceptible of being displayed on a thin client, that it may be more desirable to change this to a more text oriented approach.

15 An html embodiment is shown in Figure 4. Many messages are sent using hypertext mark-up language. The html embodiment here simply includes special reserved codes for special functions. Html code, and other similar codes, include special reserved scripts for certain functions,
20 such as color, hypertext, and the like. This system can handle html in an analogous way to those ways discussed above. Three basic embodiments are disclosed.

In the first embodiment shown in Figure 4, the text 400 is encoded in a similar way to that disclosed above.

In addition, special tags are added to certain parts of the text. The tags can be used, like tags in standard html format, to turn on or off a certain attribute. Area 405 is coded with a tag 406 indicating that area 405 should be
5 black text/green background. Transitions between the black and green are encoded as before. Any font information is simply ignored since this will be encoded as part of the run length coding scheme.

Similarly, non-text objects, such as images, are
10 marked with a location, e.g., the first location, here 410, which is encountered by the scanner. The outer size of the image is also noted, thereby shortening the lines and making the area 405 smaller. In this way, the text is sent and images are sent separately, for example, encrypted
15 using any standard encryption technique. Hyperlinks such as 415 are also encoded with the area of the text.

A second scheme steganographically changes the transmitted text to encode the image. The remainder of the technique remains the same.

20 Since the text is in color, the run length coding indicates a transition from a first color to a second color, both of which are indicated. That is, the first area of white has a transition to a second area which can be any color, e.g., purple. The purple can be indicated by

its red, green and blue values, or by a color attribute.

In a thin client only a limited number of colors may be displayable in any case. Therefore, an indicia of this 256 color value can be provided as part of the run length code.

5 Hyperlinks are indicated as one of the colors. The hyperlink must be maintained as text rather than as an image so that the hyperlink can be properly used to effect a transition.

Additional security against stitching can use variable
10 line chunks. Each line chunk can represent operations in different directions. For example, some of the line chunks may represent left to right, others right to left. Each line chunk can represent a different number of items. Each chunk therefore becomes a different sample in the set.
15 Chunks can have arbitrary sizes. In addition, the chunks can be located at arbitrary locations. By so doing, the difficulty of stitching increases as the factorial of the number of chunks. Each chunk can also be encrypted with a different encryption code, in order to further prevent
20 stitching.

Another security enhancement is provided by the separation of the control part from the actual text part. The message screen is sent in two parts including a readable part and a control part. The information in the

control part tells certain attributes about the message.

For example, in an html message, the control characters may be separated from the actual message. Hence, using this embodiment, a text message may be displayed with the

5 attributes of the text message being transmitted in the control part. The control part can be encrypted using more secure (or less secure) encryption techniques. However, the control part is encrypted using a separate encryption technique to make it more difficult to deduce the code from
10 this control part. This control part can also be sent as both a header and a footer, with the header indicating, for example, the order of lines being transmitted, and those chunks which are repeated, and the footer indicating attributes including color, hypertext and the like.

15 Although only a few embodiments have been described above, other modifications are possible. For example, one modification defines interactively determining if a resolution of the display can be reduced prior to the encryption. The resolution, for example, can be divided by
20 two, if more than a specified percentage of the lines have the same or similar run length codes.

The present application has described using this system for encryption of the information. However, this

system can also be used for sending this information over a channel without encrypting it.

All such modifications are intended to be encompassed within the following claims.

What is claimed is:

1. A method of encrypting, comprising:
obtaining text-containing information;
5 formatting said text-containing information into a
format for display, to form formatted unencrypted
information; and
encrypting said formatted unencrypted information to
form formatted encrypted information.
- 10 2. A method as in claim 1, wherein said text-
containing information is one of ASCII text, text
information and font information or HTML.
- 15 3. A method as in claim 1, further comprising:
transmitting said formatted encrypted information over
a channel to a client; and
at said client, decrypting and displaying said
formatted unencrypted information.
- 20 4. A method as in claim 1, wherein said encrypting
comprises determining a distance to a transition between a
first color and a second color, and coding said distance.

5. A method as in claim 1, further comprising
changing some aspect of said encrypting, to make it more
difficult to decode said information without a decryption
key.

5

6. A method as in claim 5, wherein said changing
comprises changing a length or direction of the coding.

7. A method as in claim 3, wherein said encrypting
10 comprises encrypting a chunk of said information at a time,
where said chunk includes a line of information, and
wherein said decrypting comprises decrypting said chunk of
information and displaying said chunk of information.

15 8. A method as in claim 7, wherein said chunk length
is variable.

9. A computer program apparatus comprising:
machine readable storage media, including instructions
20 that are effective to:
obtain a text-containing file,
format said text containing file into a display-
formatted form for display;

encoding a first chunk of said display-formatted form
text containing file, based on its display form to obtain
machine readable information indicative of said chunk,
wherein said chunk is less than an entire page of said

5 display-formatted form; and

encrypt said machine readable numbers, to form
encrypted information.

10 10. An apparatus as in claim 9, further comprising
instructions to:

receive a chunk of encrypted information; and
decrypt said chunk into unencrypted form.

15 11. An apparatus as in claim 9, further comprising
instructions to:

vary a size of chunks, so that a second chunk on the
same page as said first chunk, has a different size than
said first chunk.

20 12. An apparatus as in claim 10, wherein said
instructions to decrypt are executed on a portable
computer.

~~13.~~ A method of encrypting, comprising:

obtaining text-containing information, which is one of
is one of ASCII text, a word processing file, or HTML;

formatting said text-containing information into a
format for display, to form formatted unencrypted

5 information;

encrypting said formatted unencrypted information
according to an encryption key, to form formatted encrypted
information, said encrypting comprising determining
distances between transitions in said formatted unencrypted

10 information;

transmitting said formatted encrypted information over
a channel to a client; and

at said client, decrypting and displaying said
formatted unencrypted information.

15

14. A method as in claim 13, further comprising
changing some aspect of said encrypting, to prevent
decryption by stitching together parts of the information.

20 15. A method as in claim 13, wherein said encrypting
comprises determining distances between transitions on a
specified line of the formatted information, and
determining numbers indicative of said distances.

Abstract

Text containing files are encrypted by first
formatting the files for display. The display-formatted
5 files are then run length coded to form files indicating
the information. The files are encrypted.

10025036.doc

004240" 8226550

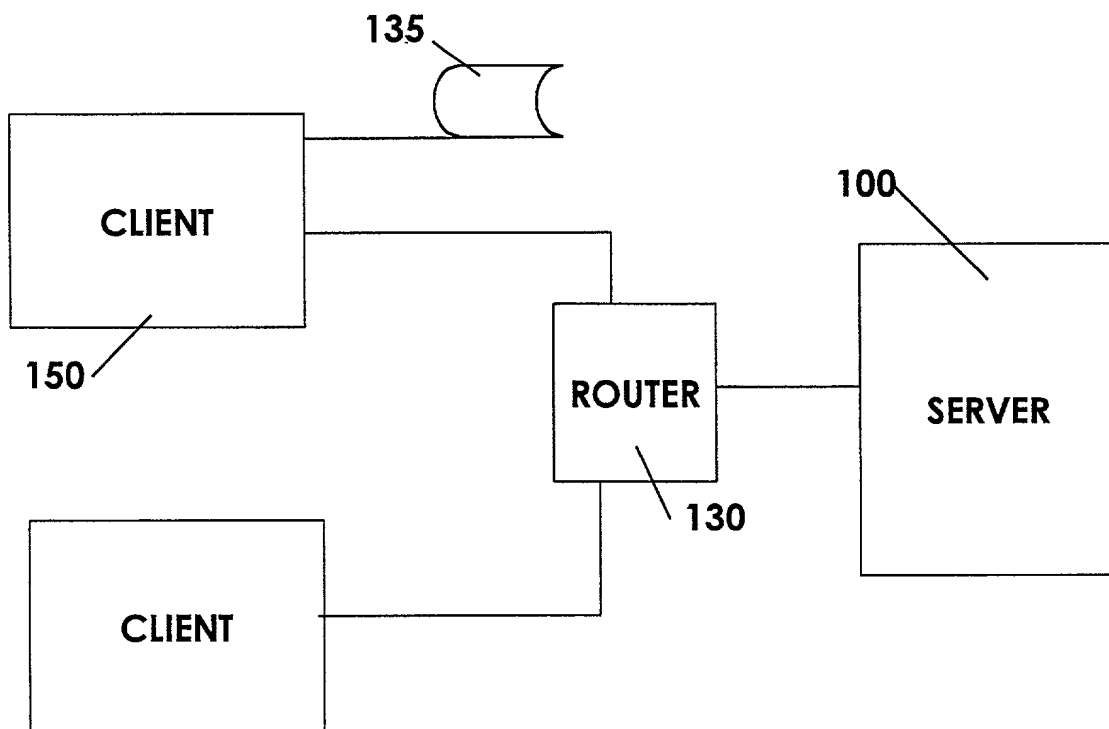


FIGURE 1

Test part 2

Parameter	Value	Unit			
Mean	1.00				
Standard deviation	0.10				
Minimum	0.80				
Maximum	1.20				
Range	0.40				
Skewness	0.00				
Kurtosis	0.00				
Mean square	0.01				
Adjusted R square	0.00				
Standard error of estimate	0.10				
Sum of squares	0.01				
Regression	0.01				
Residual	0.00				
Total	0.01				
Corrected total	0.01				
ANOVA					
Source	Sum of Squares	df	Mean Square	F	Sig.
Regression	0.01	1	0.01	0.01	0.93
Residual	0.00	1	0.00	0.00	0.97
Total	0.01	2			
Corrected Total	0.01	2			

n_2 n_3 n_4 n_5 n_6 n_8 n_{10} n_{11} n_{12}

This is a test.

Test part 2

A hand-drawn diagram of a web page layout. The page is divided into several sections. At the top, there are three labels: '405' pointing to a small box, '400' pointing to a large central box, and '410' pointing to a small box. The central box contains the text 'Hello'. To the right of the central box is a box labeled 'img 1'. Below the central box is a box labeled 'Purple Ey' with an asterisk next to it. To the left of the 'Purple Ey' box is a box labeled 'link' with an asterisk next to it. Below the 'link' box is a box labeled 'click here'. To the right of the 'click here' box is a box labeled 'Image 2'. On the left side of the diagram, there are labels 'Black' and 'Green Ey' pointing to different areas. On the right side, there is a label 'white text' pointing to the right edge. At the bottom, there is a label '415' pointing to the bottom edge.

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled PAGE ENCRYPTION SYSTEM, the specification of which:

- ☒ is attached hereto.
☐ was filed on _____ as Application Serial No. _____ and was amended on _____.
☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim the benefit under Title 35, United States Code, §119(e)(1) of any United States provisional application(s) listed below:

U.S. Serial No.	Filing Date	Status

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose all information I know to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Serial No.	Filing Date	Status

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

Combined Declaration and Power of Attorney

Page 2 of 2 Pages

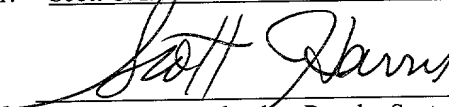
Address all telephone calls to SCOTT C. HARRIS at telephone number (619) 823-7778.

Address all correspondence to SCOTT C. HARRIS at:

PO Box 927649
San Diego, Ca 92192-7649

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: Scott C. Harris

Inventor's Signature:  Date: 4/24/00

3329 Cerros Redondos, Rancho Santa Fe, CA 92067

Residence Address:

Citizenship: USA

Post Office Address: P.O. Box 927649, San Diego, CA 92192

004240" 422550